

TWELVE COLORS TO CHOOSE FROM

POWDER COATED IN OUR FACTORY FOR THE MOST DURABLE FINISH.


STANDARD COLORS:



SELECT COLORS:




DESIGNER COLORS:

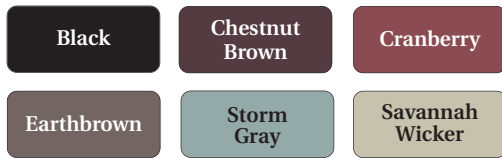

HOW TO MEASURE FOR STORM DOORS

Take all measurements from the door frame on the outside as shown in diagram. For the **width** take measurements at the top, center and bottom. For the **height** take measurements on both sides. Use the shortest measurements to determine the needed **width** and **height**.



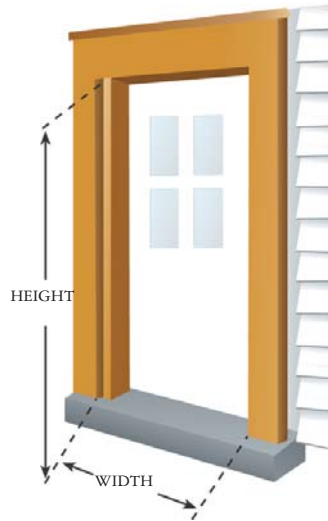


For "French-type," double doors which come together at the center, also take a **height** measurement at the center of the opening.

When ordering pre-hung storm doors, view the door from the outside and specify **left** or **right** door hinges.

HARDWARE

AVAILABLE WITH UPGRADED HARDWARE OPTIONS...

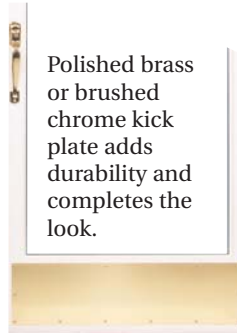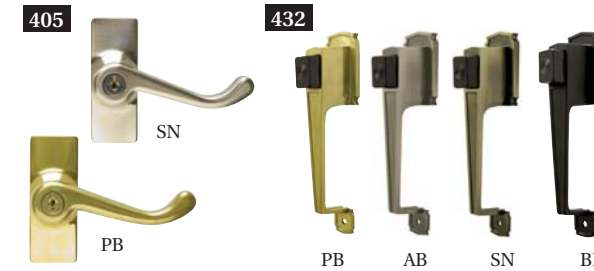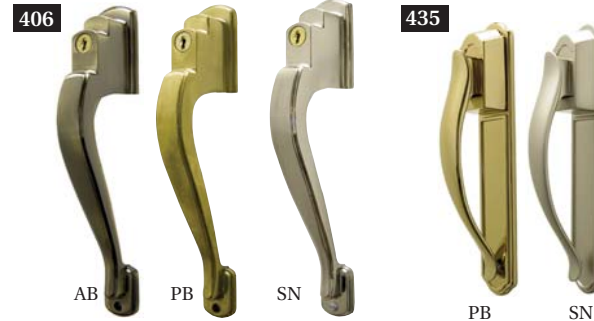

Polished brass or brushed chrome kick plate adds durability and completes the look.

COLOR KEY

Black	BL
Satin Nickel	SN
Antique Brass	AB
Polished Brass	PB

Represented by:

Kaufmann®
Window & Door

12891 Mt. Elliott • Detroit, MI 48212 • 313.893.9500
www.kaufmannwindow.com

Kaufmann®
Weld Tite
Premium Storm Door
Series 700



Custom built,
quality window and door products
made in Detroit since 1937.

Kaufmann®
Window & Door



Six popular models to choose from

Kaufmann® Weld Tite

Premium Storm Door
Series 700

Traditional designs
based on the look of
a wood screen door...
with superior
performance,
longevity and low
maintenance.



700

701

707

708

711


722

CONSIDER THE VALUE



The **Weld Tite** door corners are heliarc-welded by hand for superior strength and long lasting durability. Powder coated paint applied in our factory, provides a thick and durable finish that completely covers all exposed metal surfaces.

CONSIDER THE STYLE



A medium width frame with an attractive quarter round sash beading mimics the look of a traditional wood storm door.

CONSIDER THE FEATURES CONT.



The interior latch handle comes standard with a dead bolt.

Hinges with oil impregnated bearings assure smooth and quiet operation. Each Kaufmann storm door comes standard with four integral hinges to prevent sagging.




Double fringe weatherstripping provides a superior seal at the sill.

The antique brass push buttonlatch is standard.



A smooth 3¼" medium stile features a quarter round sash bead and 1¼" frame depth.

The center rail for the Weld Tite Premium Storm Door series 700. *(detail)*



ADDITIONAL KAUFMANN FEATURES

- Six popular models, all available in 3 standard widths (30", 32" & 36").
- Eleven popular colors to choose from.
- A full assortment of hardware options, sidelites and custom glass can dress up your door to your liking.
- Non-glare charcoal grey aluminum screen wire complements a durable screen frame.
- All doors, including custom sizes, are glazed with 1/8" thick tempered safety glass.
- The door frame is made of .050" heavy 6063 T1 aluminum and has an attractive smooth finish.
- Tough, clear polycarbonate sash retainer clips hold glass/screen securely in place. Knurled thumb screws, painted to match the door finish, allow fast seasonal window changes.
- Fully weatherstripped glass frame provides a tight seal.